



PM-850-10



DEVICE

850 nm, 10 GHz Phase Modulator

OVERVIEW

The Optilab PM-850-10 phase modulator is a 10 GHz LiNbO₃ modulator. This modulator can provide phase modulation with a low driving voltage. Its low insertion loss provides for its maximum transmission power. The PM-850-10 modulator uses polarization maintaining (PM) input and output fibers, making it easy to integrate with other optical components. Contact Optilab for more information.


FEATURES


- Up to 10 GHz Bandwidth
- Low Optical Loss
- 850 nm operating wavelength
- Low Drive Voltage
- Minimal Back Reflections
- Polarization Maintaining

USE IN

- Coherent Communications
- Optical Chirping
- Optical Sensing
- FM Spectroscopy
- Frequency Shifting
- Laser Linewidth Broadening

FUNCTIONAL DIAGRAM

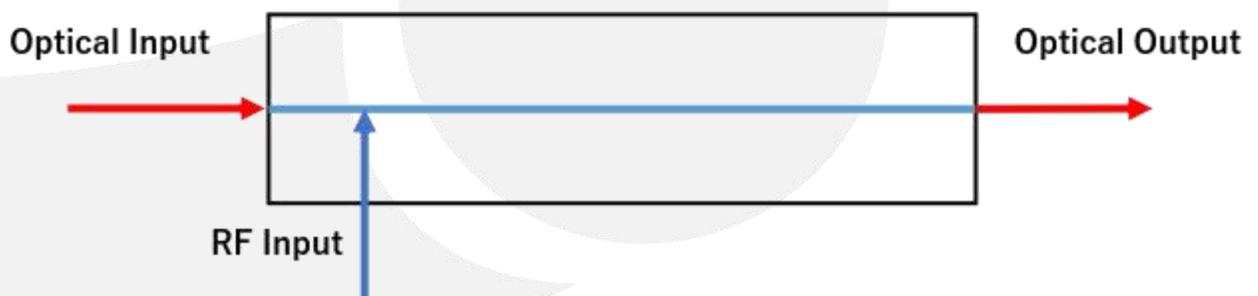



PM-850-10

SPECIFICATIONS

GENERAL

Input Optical Power	20 mW max.
Operating Wavelength	850 ± 20 nm
Insertion Loss	3.0 dB typ., 4 dB max.
Extinction Ratio	≥ 20 dB min
Optical Return Loss	≤ -45 dB
S21 Bandwidth (RF Port)	10 GHz typ.
S11 Return Loss	≤ -7 dB @ 10 GHz
V _π (RF Port)	4.8 V typ. @ 1 GHz, 5.2 V max.
RF Input Power	+27 dBm max.
Impedance	50 Ω typ.

MECHANICAL



Operating Temperature (Standard)	0°C to +60°C
Storage Temperature	-10°C to +70°C
Operating Humidity	0% to 90% Relative Humidity
Input/Output Fiber Type	SM85-PS-U400
Input/Output Connector	PM FC/APC, request for others
Material	LiNbO ₃
RF Port Connectors	SMA Female
Cabling	900 μm tubing
Dimensions	96 x 14 x 8.61 mm





PM-850-10

MECHANICAL DRAWING

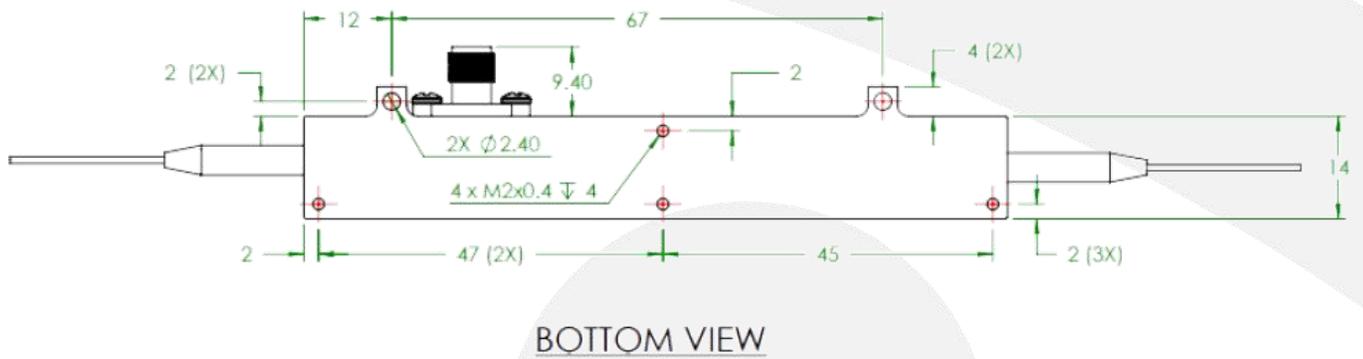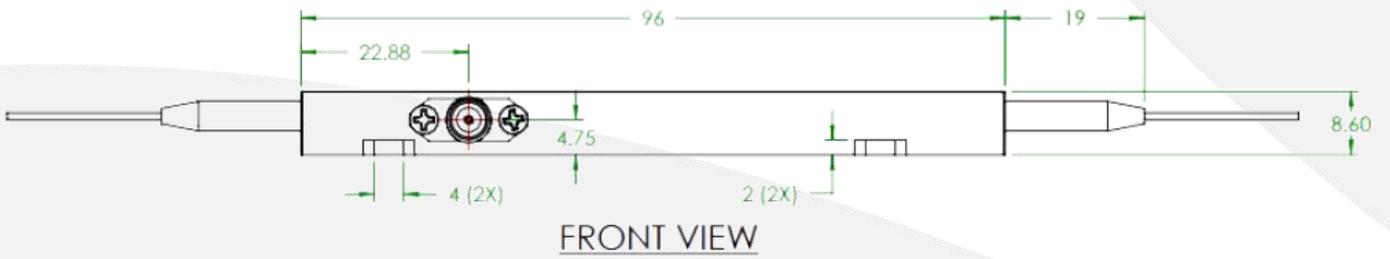

Unit: mm

